



RDG100  
RDG110  
RDG110U



RDG100T  
RDG160T  
RDG160TU

## Wall-mounted room thermostats with LCD

## RDG1..

for fan coil unit applications

for universal applications

for use with compressors in DX-type equipment

- 
- **RDG100...: Operating voltage AC 230 V, On/Off, 3-position or PWM control outputs**
  - **RDG110: Operating voltage AC 230 V, On/Off relay (SPDT) outputs**
  - **RDG110U: Operating voltage AC/DC 24 V, On/Off relay (SPDT) outputs**
  - **RDG100../RDG110...: Output for 1-speed and 3-speed**
  - **RDG160T...: Operating voltage AC/DC 24 V, DC 0...10 V or On/Off control outputs**
  - **RDG160T...: Output for 1-speed, 3-speed or ECM fan DC 0...10 V**
  - **Operating modes: Comfort, Economy and Protection**
  - **Automatic or manual fan speed**
  - **3 multifunctional inputs for keycard contact, external sensor, etc**
  - **Automatic or manual heating/cooling changeover**
  - **Adjustable commissioning and control parameters**
  - **Minimum and maximum setpoint limitation**
  - **Backlit display**
- Additional features of RDG100T, RDG160T...:**
- **Infrared remote control receiver**
  - **Auto Timer mode with 8 programmable timers**
  - **Auto timer can be disabled via P02**
  - **Auto timer can be disabled via DIP switches (RDG160T..)**
  - **Selectable relay output functions (RDG160T..)**
  - **Power reserve clock for 48 h during power failure**

The RDG1.. room thermostats are designed for use with the following types of system:

**Fan coil units** via On/Off or modulating control outputs:

- 2-pipe system
- 2-pipe system with electric heater
- 2-pipe system and radiator/floor heating
- 4-pipe system
- 4-pipe system with electric heater
- 2-stage heating or cooling system

**Chilled/heated ceilings (or radiators)** via On/Off or modulating control outputs:

- Chilled/heated ceiling
- Chilled/heated ceiling with electric heater
- Chilled/heated ceiling and radiator/floor heating
- Chilled/heated ceiling, 2-stage cooling or heating

**Heat pumps** with dx-type equipment:

- 1-stage compressor for heating or cooling
- 1-stage compressor for heating or cooling with electric heater
- 1-stage compressor for heating or cooling and radiator/floor heating
- 1-stage compressor for heating and cooling
- 1-stage compressor for heating and cooling with reversing valve
- 2-stage compressor for heating or cooling

- Maintenance of room temperature via built-in temperature sensor or external room temperature/return air temperature sensor
- Automatic or manual changeover between heating and cooling mode
- Selection of applications via DIP switches
- Selection of operating mode via the operating mode button on the thermostat
- 1-speed, 3-speed or DC 0...10 V fan control (automatic or manual)
- Display of current room temperature or setpoint in °C and/or °F
- Minimum and maximum setpoint limitation
- Button lock (automatic or manual)
- 1 digital input, freely selectable for:
  - Operating mode switchover contact (keycard)
  - Automatic heating/cooling changeover contact
  - Electric heater enable
  - Dewpoint sensor
  - Fault input
- 2 multifunctional inputs, freely selectable for:
  - Operating mode switchover contact (keycard)
  - Automatic heating/cooling changeover sensor
  - External room temperature or return air temperature
  - Dewpoint sensor
  - Electric heater enable
  - Fault input
  - Supply air temperature sensor (RDG160T..)
- Advanced fan control function, i.e. fan kick, fan start, selectable fan operation (enable, disable or depending on heating or cooling mode)
- Purge function together with 2-port valve in a 2-pipe changeover system
- Reminder to clean filters
- Floor heating temperature limit
- Minimum and maximum supply air temperature limitation (RDG160T..)
- Reloading factory settings for commissioning and control parameters
- 7-day time program: 8 programmable timers to switch over between Comfort and Economy mode (RDG100T, RDG160T..)
- Infrared remote control (RDG100T, RDG160T..)
- Selectable relay function (RDG160T..)
  - For switching OFF external equipment OFF during Protection mode
  - For switching ON external equipment (such as. pump) during H/C demand
  - Output heating/cooling sequence
- Wizard function to select working temperature unit °C or °F (RDG160TU, RDG110U)
- Power reserve clock for 48 h during power failure on RDG1..T

# Applications

The room thermostats support the following applications, which can be configured via DIP switches at the rear of the unit. Depending on the thermostat type, On/Off or modulating control outputs are available.

Applications, DIP setting, Control outputs		
<ul style="list-style-type: none"> <li>2-pipe fan coil unit</li> </ul> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>2-pipe fan coil unit and electric heater</li> </ul> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>2-pipe fan coil unit and radiator/floor heating</li> </ul> <p>Using RDG100../RDG110../RDG160T..</p>
<ul style="list-style-type: none"> <li>2-pipe/2-stage fan coil unit</li> </ul> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>4-pipe fan coil unit</li> </ul> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>4-pipe fan coil unit and electric heater</li> </ul> <p>Using RDG100..</p>
Product no.	Control outputs	Fan
RDG100..	On/Off, PWM, 3-position	3-speed, 1-speed
RDG110/RDG110U	On/Off (SPDT)	3-speed, 1-speed
RDG160T/RDG160TU	DC 0...10 V	3-speed, 1-speed
	On/Off, DC 0...10 V	DC 0...10 V ECM


## Applications, DIP setting, Control outputs

<ul style="list-style-type: none"> <li>Chilled/heated ceiling</li> </ul> <p style="text-align: right; font-size: small;">3191S11</p> <p style="text-align: right; font-size: x-small;">ON OFF 1 2 3 4 5</p> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>Chilled/heated ceiling and electric heater</li> </ul> <p style="text-align: right; font-size: small;">3191S12</p> <p style="text-align: right; font-size: x-small;">ON OFF 1 2 3 4 5</p> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>Chilled/heated ceiling and radiator /floor heating</li> </ul> <p style="text-align: right; font-size: small;">3191S14</p> <p style="text-align: right; font-size: x-small;">ON OFF 1 2 3 4 5</p> <p>Using RDG100../RDG110../RDG160T..</p>
<ul style="list-style-type: none"> <li>2-stage chilled/heated ceiling</li> </ul> <p style="text-align: right; font-size: small;">3191S15</p> <p style="text-align: right; font-size: x-small;">ON OFF 1 2 3 4 5</p> <p>Using RDG100../RDG110../RDG160T..</p>	<ul style="list-style-type: none"> <li>Chilled ceiling and radiator</li> </ul> <p style="text-align: right; font-size: small;">3191S13</p> <p style="text-align: right; font-size: x-small;">ON OFF 1 2 3 4 5</p> <p>Using RDG100../RDG110../RDG160T..</p>	

Product no.	Control outputs
RDG100..	On/Off, PWM, 3-position
RDG110/RDG110U	On/Off (SPDT)
RDG160T/RDG160TU	On/Off, DC 0...10 V


## Applications, DIP setting, Control outputs

- Heated or cooled with compressors

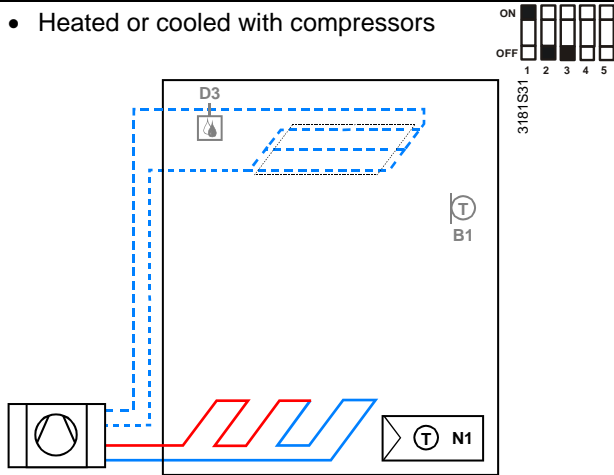


Using RDG110../RDG160T..

- Heated or cooled with compressors with electric heater

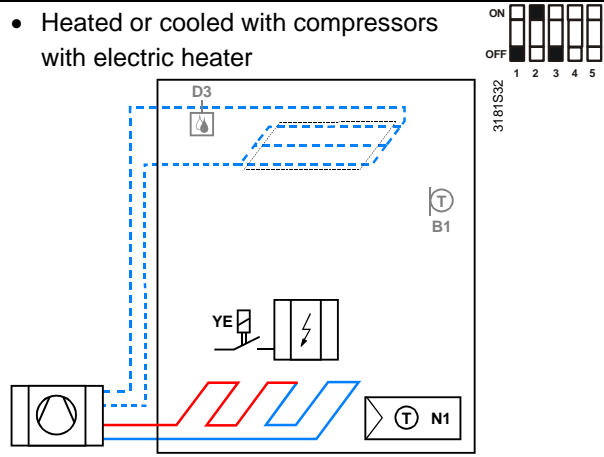


Using RDG110../RDG160T..

- Heated and cooled with compressors

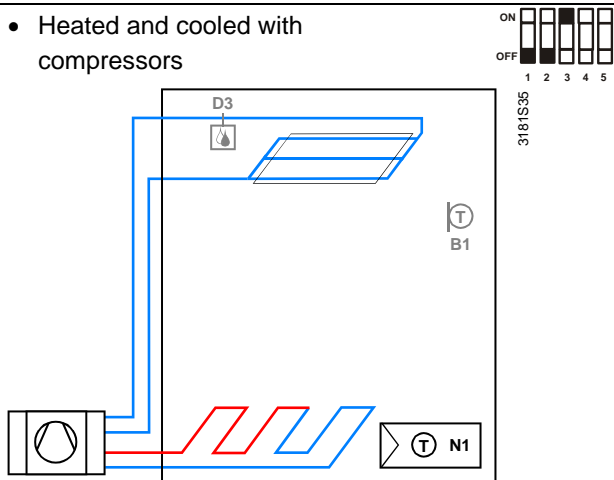

Using RDG110../RDG160T..

- 2-stage heated or cooled with compressors

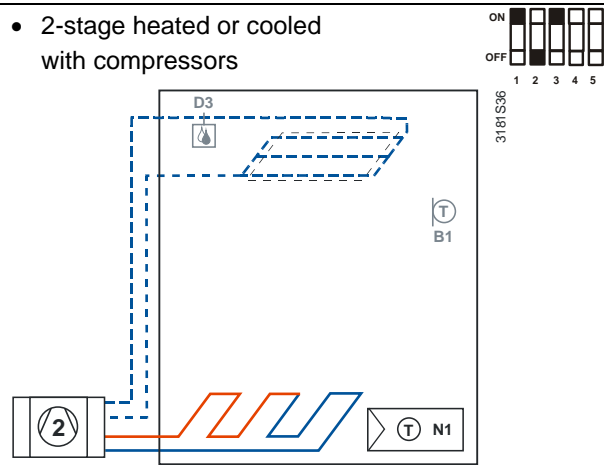

Using RDG110../RDG160T..

Product no.	Control outputs	Fan
RDG110/RDG110U	On/Off (SPDT)	Disabled, 3-speed, 1-speed
RDG160T/RDG160TU	On/Off, DC 0...10 V	Disabled, 3-speed, 1-speed, DC 0...10 V

Legend YHC.. Heating/cooling valve actuator  
 YH Heating valve actuator  
 YC Cooling valve actuator  
 YE Electric heater











M1 1-speed or 3-speed fan  
 B1 Return air temperature sensor or external room temperature sensor (optional)  
 B2 Changeover sensor (optional)

## Type summary

Product no.	Features										UL
	Operating voltage	Number of control outputs				Time program	Backlit LCD	Infrared receiver <sup>1)</sup>	Fan		
		ON/OFF	PWM	3-pos	DC 0..10 V				ECM <sup>2)</sup>	3-speed	
<b>RDG100</b>	AC 230 V	3 <sup>3)</sup>	2 <sup>3)</sup>	2 <sup>3)</sup>			✓			✓	
<b>RDG100T</b>	AC 230 V	3 <sup>3)</sup>	2 <sup>3)</sup>	2 <sup>3)</sup>		(✓) <sup>5)</sup>	✓	✓		✓	
<b>RDG110</b>	AC 230 V	2 <sup>4)</sup>					✓			✓	
<b>RDG110U</b>	AC/DC 24 V	2 <sup>4)</sup>					✓			✓	✓
<b>RDG160T</b>	AC/DC 24 V				2	(✓) <sup>5)</sup>	✓	✓		✓	
		2 <sup>6)</sup>			2 <sup>6)</sup>	(✓) <sup>5)</sup>	✓	✓	✓		
<b>RDG160TU</b>	AC/DC 24 V				2	(✓) <sup>5)</sup>	✓	✓		✓	✓
		2 <sup>6)</sup>			2 <sup>6)</sup>	(✓) <sup>5)</sup>	✓	✓	✓		

- 1) Infrared remote control must be ordered as a separate item
- 2) ECM fan output DC 0...10 V
- 3) On/Off, PWM or 3-position (triac outputs)
- 4) Relay output (SPDT)
- 5) Can be disabled via P02 (or via DIP switches on RDG160T..)
- 6) On/Off (relay output) or DC control signal

## Equipment combinations

	Description	Product no.	Data Sheet
	Infrared remote control 	<b>IRA211</b>	3059
	Cable temperature sensor or changeover sensor, cable length 2.5 m (8 feet)  NTC (3 kΩ at 25 °C (77 °F))	<b>QAH11.1</b>	1840
	Room temperature sensor  NTC (3 kΩ at 25 °C (77 °F))	<b>QAA32</b>	1747
	Cable temperature sensor, cable length 4 m (13 feet)  NTC (3 kΩ at 25 °C (77 °F))	<b>QAP1030/UFH</b>	1854
	Condensation monitor 	<b>QXA2601/ QXA2602/ QXA2603/ QXA2604</b>	3302
On/Off actuators	Electromotoric On/Off valve and actuator (only available in AP, UAE, SA and IN) 	<b>MVI../MXI..</b>	A6V11251892
	Electromotoric On/Off actuator 	<b>SFA21..</b>	4863
	Electromotoric On/Off actuator 	<b>SFP21..</b>	4863
	Zone valve actuators (only available in AP, UAE, SA and IN) 	<b>SUA..</b>	4830
On/Off and PWM actuators <sup>1)</sup>	Thermal actuator (for radiator valves) AC 230 V, NO 	<b>STA23..</b>	4884

3-position actuators	Thermal actuator (for radiator valves) AC 24 V, NO		<b>STA73..</b> <sup>*)</sup>	4884 <sup>*)</sup>
	Thermal actuator AC 230 V (for small valves 2.5 mm (0.1")), NC		<b>STP23..</b> <sup>*)</sup>	4884
	Thermal actuator AC 24 V (for small valves 2.5 mm (0.1")) NC		<b>STP73..</b> <sup>*)</sup>	4884 <sup>*)</sup>
	Electrical actuator, 3-position (for radiator valves)		<b>SSA31..</b>	4893
	Electrical actuator, 3-position (for 2- and 3-port valves/V..P45)		<b>SSC31..</b>	4895
	Electrical actuator, 3-position (for small valves 2.5 mm (0.1"))		<b>SSP31..</b>	4864
	Electrical actuator, 3-position (for small valves 5.5 mm (0.2"))		<b>SSB31..</b>	4891
	Electrical actuator, 3-position (for CombiValves VPI45)		<b>SSD31..</b>	4861
DC 0...10 V actuators	Electromotoric actuator, 3-position (for valves 5.5 mm)		<b>SAS31..</b>	4581
	Electrical actuator, DC 0...10 V (for radiator valves)		<b>SSA61..</b>	4893
	Electrical actuator, DC 0...10 V (for 2- and 3-port valves/V..P45)		<b>SSC61..</b>	4895
	Electrical actuator, DC 0...10 V (for small valves 2.5 mm (0.1"))		<b>SSP61..</b>	4864
	Electrical actuator, DC 0...10 V (for small valves 5.5 mm (0.2"))		<b>SSB61..</b>	4891
	Electrical actuator, DC 0...10 V (for CombiValves VPI45)		<b>SSD61..</b>	4861
	Electromotoric actuator, DC 0...10 V (for valves 5.5 mm)		<b>SAS61..</b>	4581
	Electrothermal actuator, AC 24 V, NC, DC 0...10 V, 2 m (6.6 feet) (for radiator valves and small valves 2.5 mm (0.1"))		<b>STA63</b>	4884
	Electrothermal actuator, AC 24 V, NO, DC 0...10 V, 2 m (6.6 feet) (for radiator valves and small valves 2.5 mm (0.1"))		<b>STP63</b>	4884

<sup>\*)</sup> With PWM control, it is not possible to ensure exact parallel running of 2 or more thermal actuators. If several fan coil systems are controlled by the same room thermostat, preference should be given to motorized actuators with On/Off or 3-position control.

#### Note

For more information about parallel operation and the maximum number of actuators that can be used, refer to the Data Sheets of the selected type of actuator and the following list:

Maximum number of actuators in parallel on the RDG100..:

- 6 SS..31.. actuators (3-pos)
- 4 ST..23.. if used with On/Off control signal
- 10 SFA.., SUA.., MVI.., MXI.. On/Off actuators
- Parallel operation of SAS31.. is not available

Maximum number of actuators in parallel on the RDG110..:

- 10 On/Off actuators



Maximum number of actuators in parallel on the RDG160T...:

- 10 SS..61.. actuators (DC)
- 10 ST..23/63/73.. actuators (DC or On/Off)
- 10 SFA..., SUA..., MVI..., MXI.. On/Off actuators
- 10 SAS61.. actuators (DC)

## Accessories

Description	Product no.	Data Sheet
Changeover mounting kit (50 pcs/package)	ARG86.3	3009

## Ordering

Product no.	Stock no.	Designation
RDG100	S55770-T158	Room thermostat
RDG100T	S55770-T159	Room thermostat, with timer
RDG110	S55770-T160	Room thermostat with relay outputs (AC 230 V)
RDG110U	S55770-T361	Room thermostat with relay outputs (AC 24 V), UL certified
RDG160T	S55770-T343	Room thermostat with timer and DC (or On/Off) output for valve and fan (AC 24 V)
RDG160TU	S55770-T362	Room thermostat with timer and DC (or On/Off) output for valve and fan (AC 24 V), UL certified

Order the **IRA211** infrared remote control separately.

Order valve actuators separately.

Order RDG110U and RDG160TU from Siemens Building Technologies USA.


## Mechanical design

The room thermostat consists of two parts:

- Plastic housing which accommodates the electronics, the operating elements and the room temperature sensor
- Mounting plate with the screw terminals


The housing engages in the mounting plate and is secured with 2 screws.

## Operation and settings

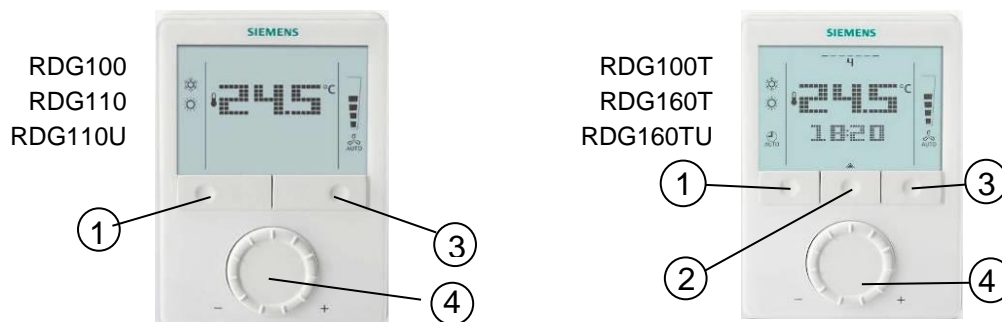


- 1 Operating mode selector/Esc
- 2 Button to enter the time and to set the timers
- 3 Fan mode selector/OK
- 4 Rotary knob for setpoint and parameter adjustment

# Display

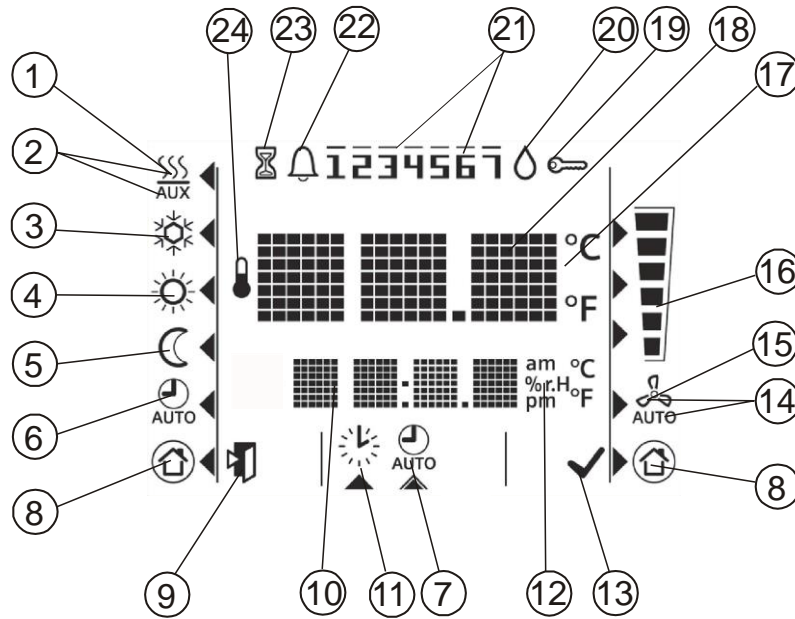

#	Symbol	Description	#	Symbol	Description	
1		Heating mode	14		Automatic fan	
2		Heating mode auxiliary heater on (2nd stage)	15		Manual fan	
3		Cooling mode	16			Fan speed 1
4		Comfort mode				Fan speed 2
5		Economy mode				Fan speed 3
6		Auto Timer mode	17		Degrees Celsius Degrees Fahrenheit	
7		View and set Auto Timer program				
8		Protection	18		Digits for room temperature and setpoint display	
9		Escape	19		Button lock	
10		Digits for time, room temperature, setpoint, etc.	20		Condensation in room (dewpoint sensor active)	
11		Setting the time of day and the weekday	21		Weekday 1...7: 1 = Monday/7 = Sunday	
12		Morning: 12-hour format Afternoon: 12-hour format	22		Fault	
			23		Temporary timer function (visible when operating mode is temporarily extended due to prolonged presence or absence)	
13		Confirmation of parameters	24		Indicates that room temperature is displayed	

Do not mount on a wall in niches or bookshelves, behind curtains, above or near heat sources, or exposed to direct solar radiation. Mount about 1.5 m (5 feet) above the floor.

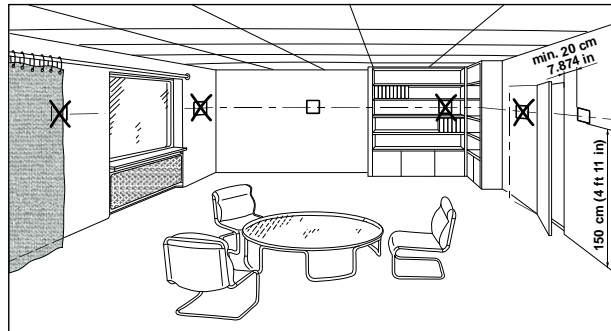

### Mounting



- The room thermostat must be mounted in a clean, dry indoor place and must not be exposed to drip or splash water.

**Warning! Do not mount the device on a metallic surface.**

### Wiring



See Mounting Instructions (M3181, M3183, M3183.1 or M3183.2) enclosed with the thermostat.



- Comply with local regulations to wire, protect and earth the thermostat.

#### Warning!

**No internal line protection for supply lines to external consumers (Q1, Q2, Q3, Yx or Yxx).**

Risk of fire and injury due to short-circuits!

- Adapt the line diameters as per local regulations to the rated value of the installed overcurrent protection device.
- The AC 230 V mains or AC 24 V supply line must have a circuit breaker with a rated current of no more than 10 A. For AC 24 V US installations, use Class 2 rated power supplies.



- Properly size the cables to the thermostat, fan and valve actuators for AC 230 V mains voltage.



- Use only valve actuators rated for AC 230 V on RDG100..., RDG110 and on RDG160T if AC 230V is connected to the "L" terminal.



- Use only 3-speed fan rated with AC 24 V on RDG160TU.



- Isolate the cables of inputs X1-M/X2-M and D1-GND if the conduit box carries AC 230 V mains voltage.

- On the RDG100.. and RDG110, inputs X1-M and X2-M carry mains potential. If the sensor's cables are extended, they must be suited for mains voltage.

- Inputs X1-M, X2-M or D1-GND of different units (e.g. summer/winter switch) may be connected in parallel with an external switch. Consider overall maximum contact sensing current for switch rating.

- Selectable relay function (RDG160T..). Consider overall maximum current through the relays.



- Disconnect power supply before removing the thermostat from the mounting plate!

## Commissioning

1. Select the application via the DIP switches at the rear of thermostat before fitting the front housing to the mounting plate.
2. Power up the thermostat after successfully connecting the line power. The thermostat starts to reset and all LCD segments flash, indicating that the reset was correct.

After the reset, which takes about 3 seconds, the thermostat is ready for commissioning by qualified HVAC staff. The control parameters of the thermostat can be set to ensure optimum performance of the entire system (see Basic Documentation P3181).

Temperature unit selection wizard (only for RDG110U and RDG160TU)

The temperature unit selection wizard enables to select the preferable temperature unit display on thermostat between °C and °F.

1. Rotate rotary knob to select the preferable temperature unit.
2. Press the button ✓ (OK) to confirm the selection, and the thermostat goes to normal operating page.

Notes

- Pressing button ↵ (Esc) does not confirm the temperature unit selection.
- If the temperature unit is not selected, °C is used by default.

Control sequence

- The control sequence may need to be set via parameter P01 depending on the application. The factory setting for the 2-pipe application is "Cooling only"; and "Heating and cooling" for the 4-pipe application.

Compressor-based application ⚠

- When the thermostat is used in connection with a compressor, the minimum output on-time (parameter P48) and off-time (parameter P49) for Y11/Y21 (RDG110) must be adjusted to avoid damage to the compressor and shortening its life.

Calibrate sensor

- Recalibrate the temperature sensor via parameter P05 if the room temperature displays on the thermostat does not match the room temperature measured.

Adaptive temperature compensation for el. heating

- If an electric heater is directly connected to output Y21, the load current of the electric heater should be indicated in parameter P46. (RDG110, Index D and higher only). Default setting: 1 A for loads up to 1 A.

Setpoint and setpoint range limitation

- We recommend to review the setpoints and setpoint ranges (parameters P08...P12) and change them as needed to achieve maximum comfort and save energy.

## Disposal



This symbol or any other national label indicate that the product, its packaging, and, where applicable, any batteries may not be disposed of as domestic waste. Delete all personal data and dispose of the item(s) at separate collection and recycling facilities in accordance with local and national legislation. For additional details, refer to [Siemens information on disposal](#).

## Technical data

### RDG100../RDG110

 Power supply

Rated voltage	AC 230 V
Frequency	50/60 Hz
Power consumption	RDG100.. Max. 8 VA/1 W RDG110 Max. 12 VA/2 W
Power reserve clock during power failure: RDG100T ≥ index K	Minimum 48 h



No internal fuse.  
External preliminary protection with max. C 10 A circuit breaker required in all cases.

Outputs

Fan control Q1, Q2, Q3-N	AC 230 V
Rating min, max resistive (inductive)	AC 5 mA...5(4) A



Note!

#### Fans must NOT be connected in parallel!

Connect one fan directly, for additional fans, one relay for each speed.

Control outputs

Y1, Y2, Y3, Y4-N	RDG100.. AC 230 V, AC 8 mA...1 A
Power limitation	3 A fast microfuse, cannot be exchanged
Y11-N/Y21-N (NO)	RDG110 AC 230 V, AC 5 mA...5(3) A



No internal fuse.  
External preliminary protection with max. C 10 A circuit breaker in the supply line required under all circumstances.

Inputs


Multifunctional inputs

X1-M/X2-M

Temperature sensor input

Type	NTC (3 kΩ at 25 °C)
Temperature range	0...49 °C
Cable length	Max. 80 m

Digital input

Operating action	Selectable (NO/NC)
Contact sensing	DC 0...5 V, max. 5 mA
Parallel connection of several thermostats for one switch	Max. 20 thermostats per switch. <b>Do not mix with D1!</b>
Insulation against mains	N/A, mains potential 

D1-GND

Operating action	Selectable (NO/NC)
Contact sensing	SELV DC 6...15 V, 3...6 mA
Parallel connection of several thermostats for one switch	Max. 20 thermostats per switch. <b>Do not mix with X1/X2!</b>
Insulation against mains	3.75 kV, reinforced insulation

Function input

External temperature sensor, changeover sensor, operating mode switchover contact, dewpoint monitor contact, enable electric heater contact, fault contact	Selectable
--	------------

Eco design and labelling directives

Based on EU Regulation 813/2013(Eco design directive) and 811/2013 (Labelling directive) concerning space heaters, combination heaters ,the following classes apply:

RDG100..

Application with On / Off operation of a heater	Class I	value 1.0%
PWM (TPI) room thermostat, for use with On/Off output heaters	Class IV	value 2.0%

RDG110

Application with On / Off operation of a heater	Class I	value 1.0%
---	---------	------------

## RDG110U

 Power supply


Rated voltage	SELV AC/DC 24 V
	or
DC 24 V: connect G to + and G0 to -	AC/DC 24 V class 2 (US)
Frequency	50/60 Hz
Power consumption	Max. 2 VA/1 W
External supply line protection (EU)	Circuit breaker max. 10 A Characteristic B, C, D according to EN 60898
	or
	Power source with current limitation of max. 10 A



No internal fuse.  
External preliminary protection with max. C 10 A circuit breaker required in all cases.

Outputs

Fan control Q1, Q2, Q3-G0	AC 24 V
Rating min, max resistive (inductive)	AC 5 mA...5(4) A

 Note!

**Fans must NOT be connected in parallel!**

Connect one fan directly, for additional fans, one relay for each speed.



Control outputs	
Y11-G0/Y21-G0 (NO)	RDG110U AC 24 V, AC 5 mA...5(3) A

No internal fuse.  
External preliminary protection with max. C 10 A circuit breaker in the supply line  
required under all circumstances.

Inputs


Multifunctional inputs

X1-M/X2-M

Temperature sensor input

Type	NTC (3 k $\Omega$ at 25 °C(77 °F))
Temperature range	0...49 °C (32...120°F)
Cable length	Max. 80 m (262 feet)

Digital input

Operating action	Selectable (NO/NC)
Contact sensing	DC 0...5 V, max. 5 mA
Parallel connection of several thermostats for one switch	Max. 20 thermostats per switch. <b>Do not mix with D1!</b>
Insulation against mains	N/A, mains potential 

D1-GND

Operating action	Selectable (NO/NC)
Contact sensing	SELV DC 6...15 V, 3...6 mA
Parallel connection of several thermostats for one switch	Max. 20 thermostats per switch. <b>Do not mix with X1/X2!</b>

Function input

External temperature sensor, changeover sensor, operating mode switchover contact, dewpoint monitor contact, enable electric heater contact, fault contact	Selectable
---	------------

**RDG160T..**

 Power supply

Rated voltage SELV AC/DC 24 V  
 or  
 DC 24 V: connect G to + and G0 to -  
 Frequency AC/DC 24 V class 2 (US)  
 50/60 Hz  
 Power consumption Max. 2 VA/1 W  
 External supply line protection (EU) Circuit breaker max. 10 A  
 Characteristic B, C, D  
 according to EN 60898  
 or  
 Power source with current  
 limitation of max. 10 A  
 Minimum 48 h



Power reserve clock during power failure:  
 RDG160T ≥ index D  
 RDG160TU ≥ index B

No internal fuse.  
 External preliminary protection in G-G0 lines with max C 10 A circuit breaker  
 required in all cases.

Outputs

Q1/Q2/Q3/L - N (relay)	RDG160T	AC 24...230 V
Q1/Q2/Q3/C – G0 (relay)	RDG160TU	AC 24 V class 2 (U.S.)

Use for 3-speed fan control  
 Rating min, max resistive (inductive) 5 mA...5(4) A

 Note!

**Fans must NOT be connected in parallel!**  
 Connect one fan directly, for additional fans, one relay for each speed.

Use for actuator control (Q1, Q2)  
 Q1 - rating min, max resistive/inductive 5 mA...1 A  
 Q2 - rating min, max resistive (inductive) 5 mA...5(4) A  
 Max total load current Q1+Q2(+Q3) 5 A

Use for external equipment (Q1, Q2, Q3)  
 Rating min, max resistive/inductive Qx 5 mA...1 A  
 Max total load current Q1+Q2+Q3 2 A



No internal fuse.  
 External preliminary protection in L line with max C 10 A circuit breakers  
 required in all cases.

ECM fan control Y50 - G0	SELV DC 0...10 V, Max. ±5 mA
--------------------------	---------------------------------

Actuator control Y10 - G0/Y20 - G0 (G)	SELV DC 0...10 V, Max. ±1 mA
--	---------------------------------


Inputs

Multifunctional inputs  
 X1-M/X2-M  
 Temperature sensor input  
 Type NTC (3 kΩ at 25 °C (77 °F))  
 Temperature range 0...49 °C (32...120°F)  
 Cable length Max. 80 m (262 feet)

Digital input  
 Operating action Selectable (NO/NC)  
 Contact sensing DC 0...5 V, max. 5 mA  
 Parallel connection of several thermostats for one switch Max. 20 thermostats per switch

D1-GND  
 Operating action Selectable (NO/NC)  
 Contact sensing DC 6...15 V, 3...6 mA  
 Parallel connection of several thermostats for one switch Max. 20 thermostats per switch

Function of inputs Selectable  
 External room temperature sensor, heating/cooling changeover sensor, operating mode switchover X1: P38  
 contact, dewpoint monitor contact, enable electric X2: P40  
 heater contact, fault contact, monitoring input, D1: P42  
 supply air temperature

Eco design and labelling directives	Based on EU Regulation 813/2013 (Eco design directive) and 811/2013 (Labelling directive) concerning space heaters, combination heaters, the following classes apply: RDG160T:	
	Application with On / Off operation of a heater	Class I value 1.0%
	Modulating room thermostat, for use with modulating heaters	Class V value 3.0%
Operational data, all types	Switching differential, adjustable	
	Heating mode	(P30) 2 K (0.5...6 K) 4 °F (1...12 °F)
	Cooling mode	(P31) 1 K (0.5...6 K) 2 °F (1...12 °F)
	Setpoint setting and setpoint range	
	☀ Comfort mode	(P08) 21 °C (5...40 °C) 70 °F (41...104 °F)
	⌚ Economy mode	(P11-P12) 15 °C (59 °F)/30 °C (86 °F) (OFF, 5...40 °C (41...104 °F)
	🔒 Protection	(P65-P66) 8 °C (46 °F)/OFF (OFF, 5...40 °C (41...104 °F)
	Multifunctional inputs X1/X2/D1	
	Input X1	Selectable Ext. temperature sensor (P38=1)
	Input X2	Changeover sensor (P40=2)
	Input D1	Operating mode switchover (P42=3)
	Built-in room temperature sensor	
	Measuring range	0...49 °C (32...120 °F)
	Accuracy at 25 °C (77 °F)	< ± 0.5 K (± 1 °F)
	Temperature calibration range	± 3.0 K (± 6 °F)
	Settings and display resolution	
	Setpoints	0.5 °C (1 °F)
	Current temperature value displayed	0.5 °C (1 °F)
Environmental conditions	Operation	
	Climatic conditions	As per IEC 60721-3-3 Class 3K5
	Temperature	0...50 °C (32...122 °F)
	Humidity	<95% r.h.
	Transport	
	Climatic conditions	As per IEC 60721-3-2 Class 2K3
	Temperature	-25...65 °C (-13...149 °F)
	Humidity	<95% r.h.
	Mechanical conditions	Class 2M2
	Storage	
	Climatic conditions	As per IEC 60721-3-1 Class 1K3
	Temperature	-25...65 °C (-13...149 °F)
	Humidity	<95% r.h.
Standards and directives	EU Conformity (CE)	CE1T3181xx <sup>1)</sup>
	Electronic control type	2.B (micro-disconnection on operation)
	RCM Conformity	CE1T3181en_C1 <sup>1)</sup>
	 UL (RDG110U/RDG160TU)	UL 916 PAZX CSA-C22.2 No. 205 PAZX7 <a href="http://ul.com/database">http://ul.com/database</a>
	Protection class	RDG100..., RDG110, RDG160T II as per EN60730 RDG110U, RDG160TU III as per EN60730
	Pollution class	Normal



---

Degree of protection of housing	IP30 to EN60529
---------------------------------	-----------------

---

Environmental Compatibility	The product environmental declaration CE1E3181 <sup>1)</sup> and CE1E3181_1 <sup>1)</sup> contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).
-----------------------------	--

---

General	Connection terminals	Solid wires or prepared stranded wires 1 x 0.4...2.5 mm <sup>2</sup> (14 gauge) or 2 x 0.4...1.5 mm <sup>2</sup> (16 gauge)
---------	----------------------	---

---

**Note:** For sensors on inputs X1, X2, or D1, the cable length is max. 80 m (262 feet).

---

Wiring cross section on	Min. 1.5 mm <sup>2</sup> (16 gauge)
L, N, Q1, Q2, Q3, Y1, Y2, Y3, Y4, Y11, Y21	

---

Housing front color	RAL 9003 white
---------------------	----------------

---


Weight	RDG100../RDG110.. 0.30 kg
	RDG160T.. 0.32 kg

---

<sup>1)</sup> The documents can be downloaded from <http://siemens.com/bt/download>.


## Connection terminals

RDG100,  
RDG100T

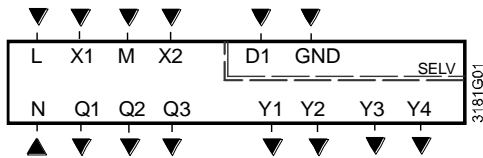


3181G01

RDG110

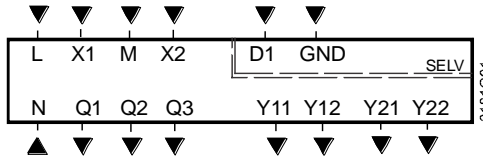


3181G01

RDG110U

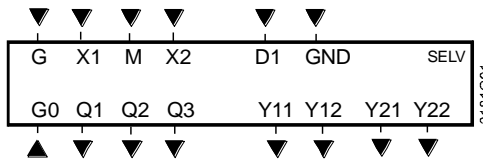


3181G01

RDG160T

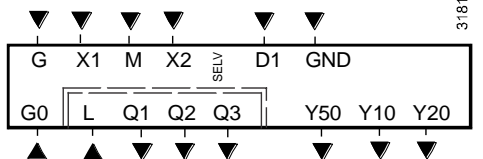

3181A11

RDG160TU

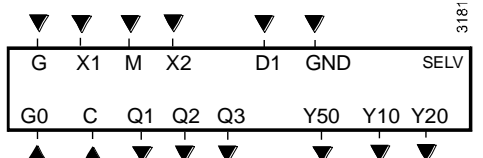


3181A12

- L, N Operating voltage AC 230 V  
G, G0 Operating voltage AC/DC 24 V  
**Note: For DC 24 V:** G0 = -; G = +
- X1, X2 Multifunctional input for temperature sensor (e.g. QAH11.1) or potential-free switch  
Factory setting :  
- X1 = external room temperature sensor  
- X2 = sensor or switch for heating/cooling changeover  
Change of setting: Parameters P38, P40
- M Measuring neutral for sensor and switch
- D1, GND Multifunctional input for potential-free switch.  
Factory setting: Operating mode switchover contact  
Change of setting: Parameter P42
- Q1 Control output fan speed "low"  
Q2 Control output fan speed "medium"  
Q3 Control output fan speed "high"
- Y1...Y4 Control output "Valve" AC 230 V (NO, for normally open valves), output for electric heater via external relay
- Y11, Y21 Control output "Valve" AC 230 V for RDG110  
Control output "Valve" AC 24 V for RDG110U (NO, for normally open valves), output for compressor or electric heater
- Y12, Y22 Control output "Valve" AC 230 V for RDG110  
Control output "Valve" AC 24 V for RDG110U (NC, for normally closed valves)
- G, G0 Operating voltage AC/DC 24 V  
**Note: For DC 24 V:** G0 = -; G = +
- L (-N) Power supply relay output Q1...3 AC 24...230 V for RDG160T
- Y10, Y20 Control output for DC 0...10 V actuator  
Y50 Control output "Fan" DC 0...10 V
- Q1 ... 3 Control output fan, valve, el. heater or ex. equipment
- C (-G0) Power supply relay output Q1...3 AC 24 V for RDG160TU

Connection diagrams

RDG100..


Application

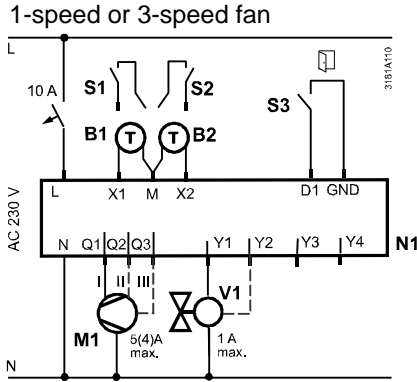


- N1 Room thermostat RDG100..
- M1 1-speed or 3-speed fan
- V Valve actuators:  
On/Off, heating, cooling, radiator, heating/cooling, 1<sup>st</sup> or 2<sup>nd</sup> stage
- S1, S2 Switch (keycard, window contact, etc.)
- S3 Switch at SELV input (keycard, window contact)
- B1, B2 Temperature sensor (return air temperature, external room temperature, changeover sensor, floor temperature limit, etc.)
- Q Relay outputs
- Y1...Y4 Triac outputs
- YH Heating valve actuator
- YC Cooling valve actuator
- YHC Heating/cooling valve actuator
- YR Radiator valve actuator
- YE Electric heater with relay/contactator
- Y
- YHC1/YHC2 1<sup>st</sup>/2<sup>nd</sup> stage

- 2-pipe YHC


- 2-pipe & radiator YHC YR
- 4-pipe YH YC
- 2-stage YHC1 YHC2



- 2-pipe & el. heater YHC YE



- 4-pipe & el. heater YH YC
- YE




**RDG110**

**Application**

1-speed or 3-speed fan

V1  
↓  
V2  
↓

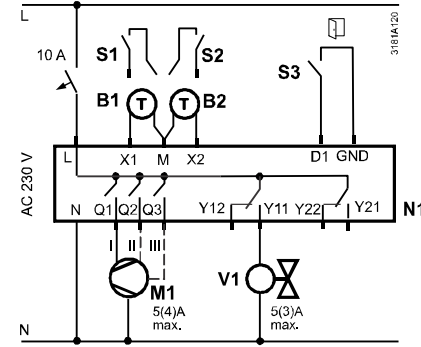


- 2-pipe

YHC


- 2-pipe & radiator
- 4-pipe
- 2-stage

YHC YR  
YH YC  
YHC1 YHC2




- 2-pipe & el. heater

YHC YE




- 1 and 2-stage compressor

C1 C2




- Compressor & el. heater

C1 YE



- Compressor & reversing valve

RV C1




- N1 Room thermostat RDG110
- M1 1-speed or 3-speed fan
- V Valve actuators:  
On/Off, heating, cooling, radiator, heating/cooling, 1<sup>st</sup> or 2<sup>nd</sup> stage
- S1, S2 Switch (keycard, window contact, etc.)
- S3 Switch at SELV input (keycard, window contact)
- B1, B2 Temperature sensor (return air temperature, external room temperature, changeover sensor, floor temperature limit, etc.)
- Q Relay outputs
- Y11...Y22 Relay outputs
- YH Heating valve actuator
- YC Cooling valve actuator
- YHC Heating/cooling valve actuator
- YR Radiator valve actuator
- YE Electric heater max. 5 A
- YHC1/YHC2 1<sup>st</sup>/2<sup>nd</sup> stage
- C1/C2 Compressor 1<sup>st</sup> and 2<sup>nd</sup> stage
- RV Reversing valve

# RDG110U

## 1-speed or 3-speed fan

### Application

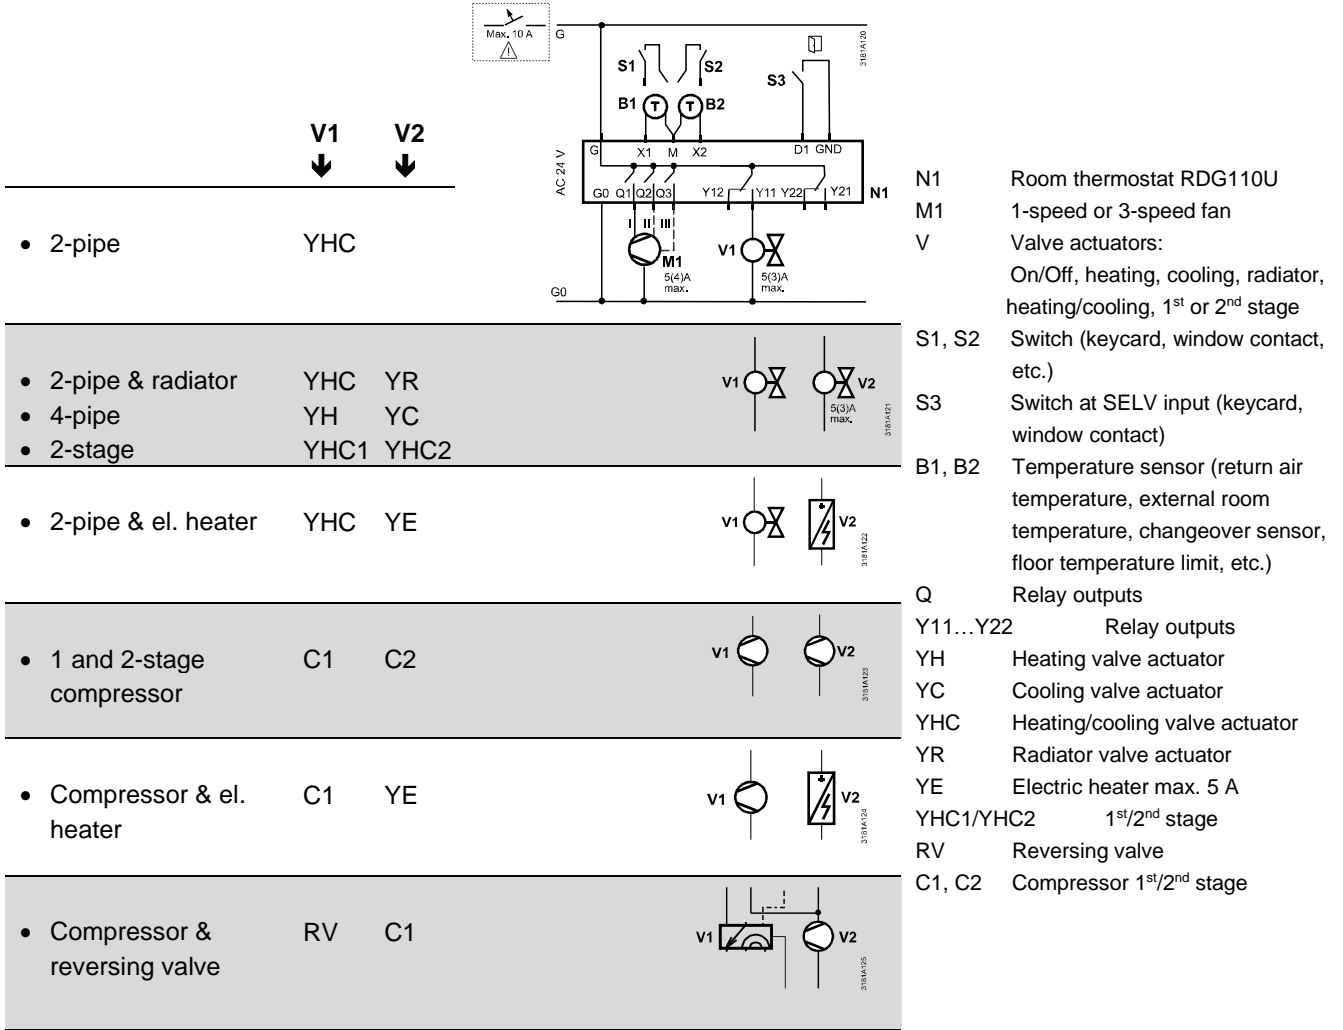



⚠ For US installations, use Class 2 rated power supplies.  
 For other installations, use circuit breakers with rated current of no more than 10 A.

**RDG160T**

**DC 0...10 V fan**

**1-speed/3-speed fan**

**Application**      **V1**      **V2**  
 ↓                      ↓

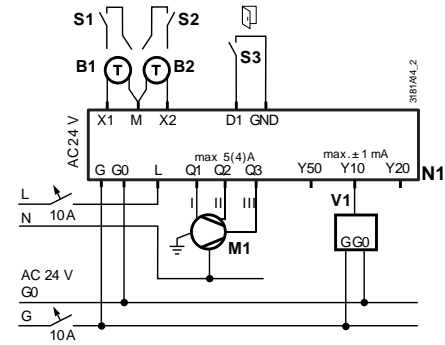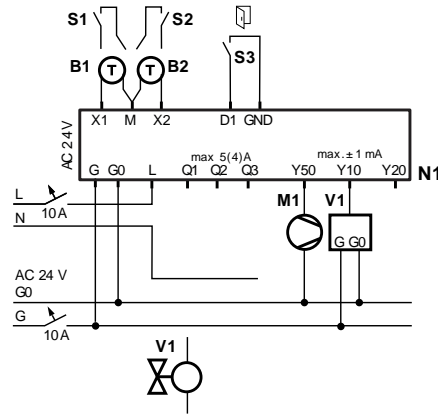


- 2-pipe                      YHC




- 2-pipe and radiator                      YHC      YR
- 4-pipe                                      YH      YC
- 2-stage                                      YHC1    YHC2


Q1 Q2                      Y10 Y20                      Y10 Y20



- 2-pipe and electric heater                      YHC      YE

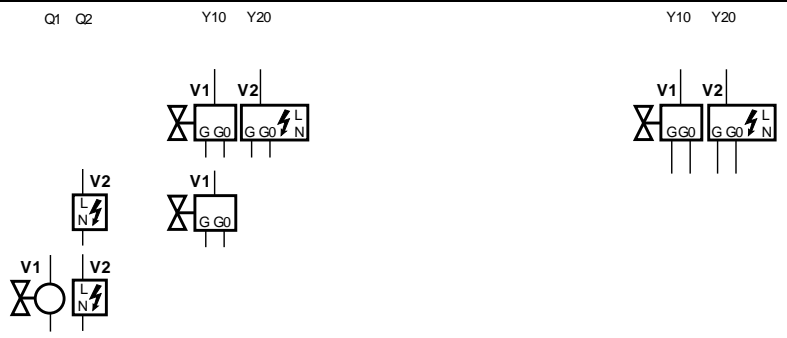

- Compressor 1-stage                      C1
- Compressor 2-stage                      C1      C2




N1	Room thermostat RDG160T	M1	1-speed or 3-speed fan, DC 0...10 V fan
S1...S3	Switch (keycard, window contact, presence detector, etc.)	V1, V2	Valve actuators: On/Off, DC 0...10 V, heating, cooling, radiator, 1 <sup>st</sup> or 2 <sup>nd</sup> stage
B1, B2	Temperature sensor (return air temperature, external room temperature, changeover sensor, etc.)	YH	Heating valve actuator
YE	Electric heater max. 5 A	YC	Cooling valve actuator
C1, C2	Compressor 1 <sup>st</sup> /2 <sup>nd</sup> stage	YHC	Heating/cooling valve actuator
		YHC1/YHC2	1 <sup>st</sup> /2 <sup>nd</sup> stage
		YR	Radiator valve actuator

# RDG160TU

## DC 0...10 V fan


## 1-speed/3-speed fan

**Application**      **V1**      **V2**  
 ↓                      ↓

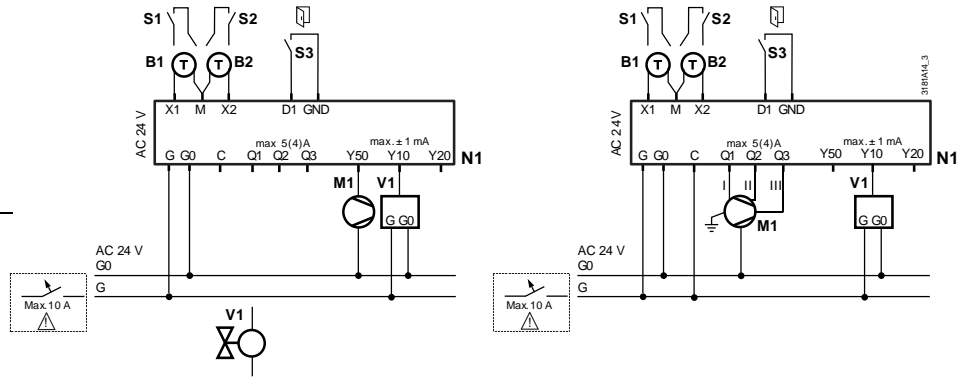


- 2-pipe                      YHC


- 2-pipe and radiator      YHC    YR
- 4-pipe                      YH     YC
- 2-stage                     YHC1   YHC2

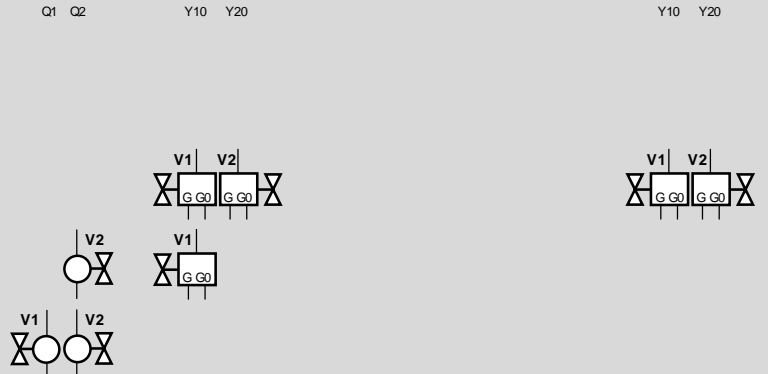

- 2-pipe and electric heater      YHC    YE

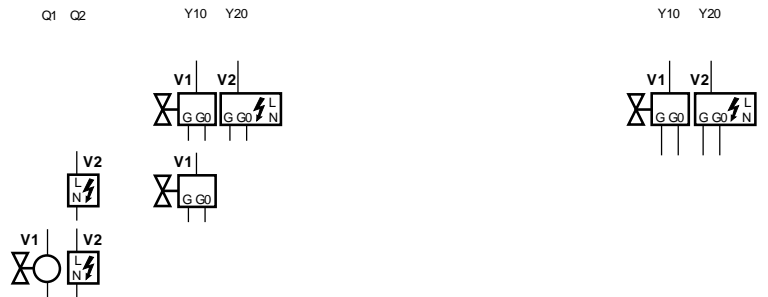


- Compressor 1-stage      YHC1
- Compressor 2-stage      YHC1   YHC2



N1	Room thermostat RDG160TU	M1	1-speed or 3-speed fan, DC 0...10 V fan
S1...S3	Switch (keycard, window contact, presence detector, etc.)	V1, V2	Valve actuators: On/Off, DC 0...10 V, heating, cooling, radiator, 1 <sup>st</sup> or 2 <sup>nd</sup> stage
B1, B2	Temperature sensor (return air temperature, external room temperature, changeover sensor, etc.)	YH	Heating valve actuator
YR	Radiator valve actuator	YC	Cooling valve actuator
YE	Electric heater max. 5 A	YHC	Heating/cooling valve actuator
		YHC1/YHC2	1 <sup>st</sup> /2 <sup>nd</sup> stage

⚠ For US installations, use Class 2 rated power supplies.  
 For other installations, use circuit breakers with rated current of no more than 10 A.

## Dimensions

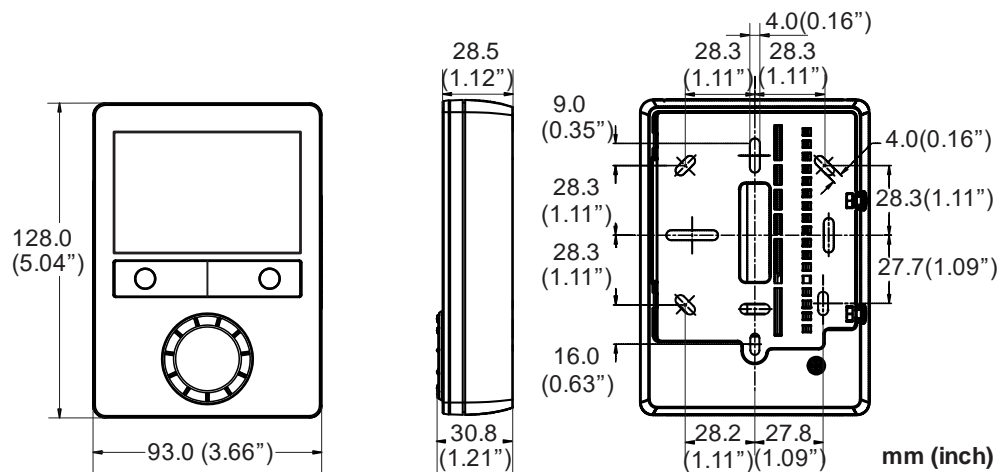

Issued by  
 Siemens Switzerland Ltd  
 Smart Infrastructure  
 Global Headquarters  
 Theilerstrasse 1a  
 CH-6300 Zug  
 Tel. +41 58 724 2424  
[www.siemens.com/buildingtechnologies](http://www.siemens.com/buildingtechnologies)

© Siemens 2016 - 2023

Technical specifications and availability subject to change without notice.